

# STAR Pro SERIES N-TOPCon 108-cell MODULE BIFACIAL

## EG-440NT54-HL/BF-DG

### 420~440W

0~3% POSITIVE TOLERANCE

#### KEY FEATURES



**SMBB cell design**  
Super multi Busbar cells brings lower resistance and increased Busbar reflectance ensures higher power output



**Low degradation**  
Adopt N-Type TOPCon cell technology, lower degradation and better temperature co-efficiency, greatly increased on generation performance




**High Reliability**  
Strict in-house testing in PV Lab which is CNAS approved & TUV /VDE certified



**Excellent Low-light Performance**  
Advanced solar cell and glass surface texturing technology allows for excellent performance in low-light environments




**PID Resistant**  
Excellent PID resistance performance optimized by unique structural design

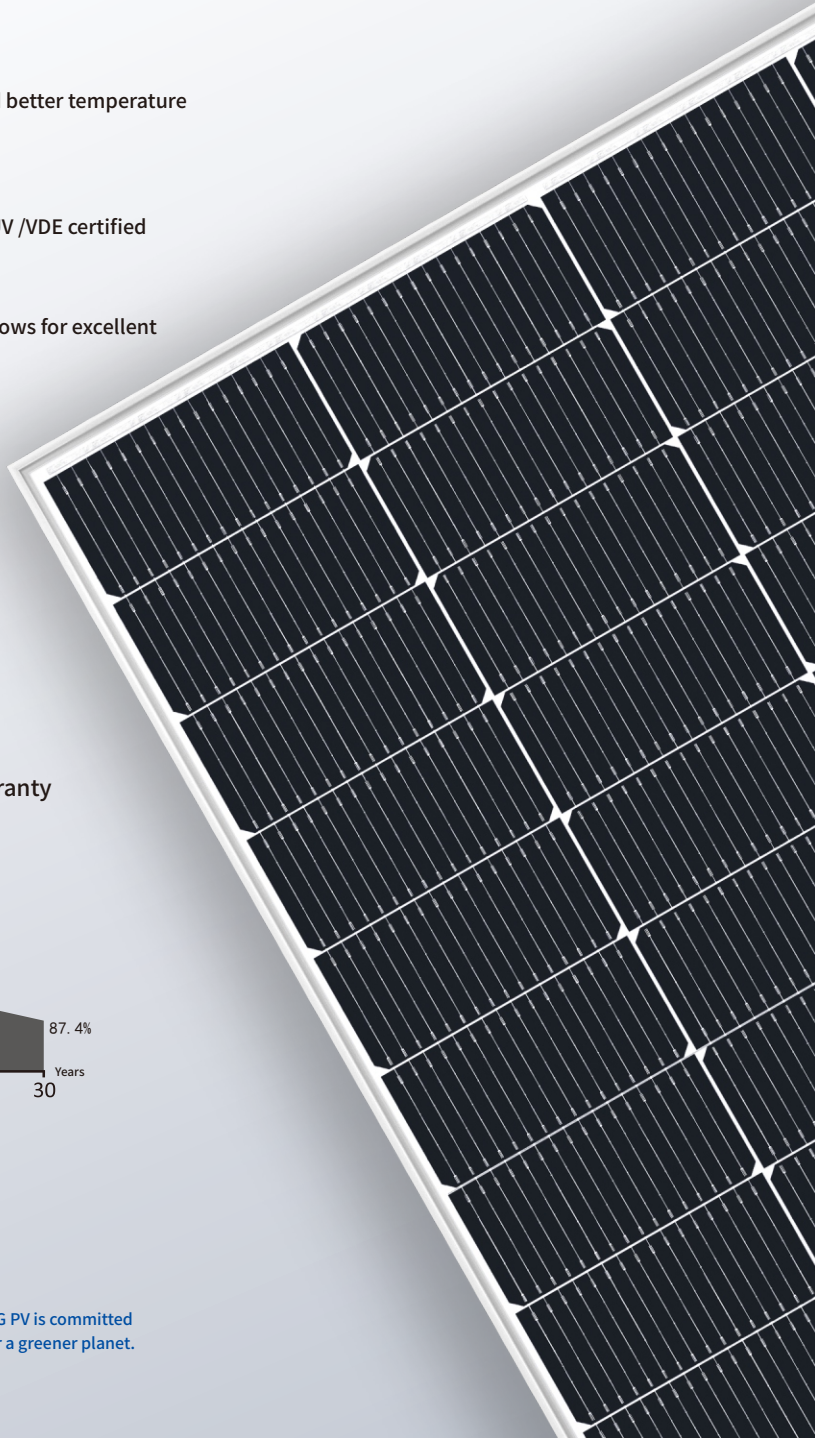

#### LINEAR PERFORMANCE WARRANTY


**15** 15 Year Product Warranty    **30** 30 Year Linear Power Warranty

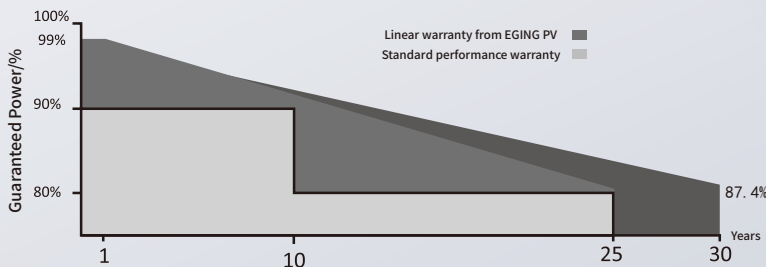


As a BloombergNEF Tier 1 and global leading manufacturer since 1998, EGING PV is committed to supplying reliable and durable PV products to customers to create together a greener planet.

# EG-440NT54-HL/BF-DG

## Engineering Drawings

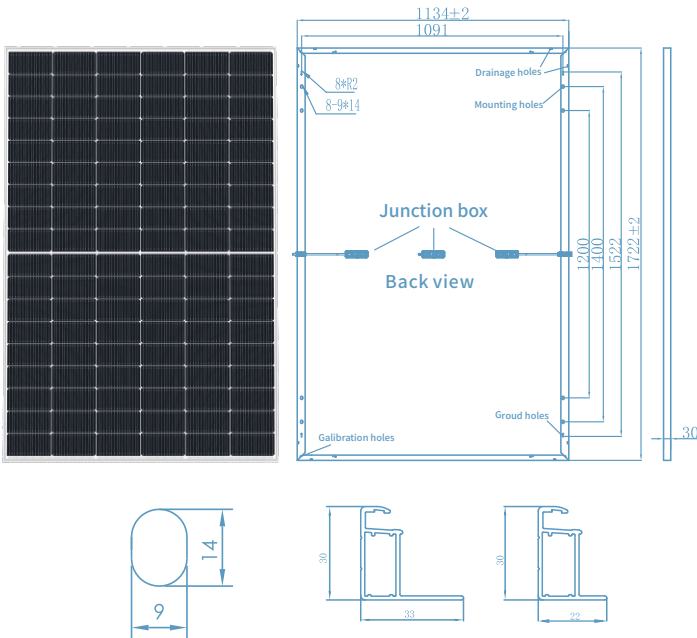

## I-V Curves

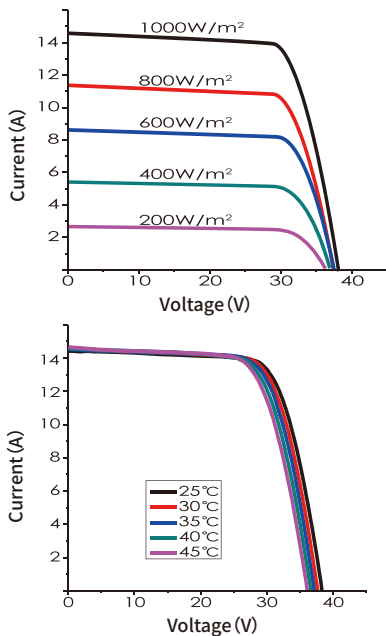

## Packing Configuration

Pieces per pallet	36
Size of packing (mm)	1750*1135*1255
Weight of packing (kg)	916
Pieces per container	936
Size of container	40' HC

## Electrical Characteristics

Power level	420	425	430	435	440
Pmax (W)	420	425	430	435	440
Vmp (V)	31.47	31.65	31.83	32.01	32.19
Imp (A)	13.35	13.43	13.51	13.59	13.67
Voc (V)	38.03	38.21	38.39	38.57	38.75
Isc (A)	14.16	14.24	14.32	14.40	14.48
Module efficiency (%)	21.5	21.8	22.0	22.3	22.5
Maximum system voltage (V)	1500				
Fuse Rating (A)	25				
Temperature coefficient Pmax (%/°C)	-0.29				
Temperature coefficient Isc (%/°C)	0.046				
Temperature coefficient Voc (%/°C)	-0.24				

STC: Irradiance 1000W/m², module temperature 25°C, AM=1.5

## Bifacial Output-Backside Power Gain

10%	Pmax(W)	462	468	473	479	484
	Module efficiency (%)	23.7	24.0	24.2	24.5	24.8
20%	Pmax(W)	504	510	516	522	528
	Module efficiency (%)	25.8	26.1	26.4	26.7	27.0

## Working Characteristics

Power level	420	425	430	435	440
Pmax (W)	316	320	323	327	331
Vmp (V)	29.16	29.36	29.45	29.65	29.82
Imp (A)	10.84	10.90	10.97	11.03	11.10
Voc (V)	36.05	36.22	36.39	36.55	36.73
Isc (A)	11.49	11.56	11.62	11.69	11.76
Power tolerance (%)	0~+3				
NOCT (°C)	44±2				

NOCT: Conditions: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s

## Mechanical Characteristics

Number of cells	108pcs
Size of cell (mm)	182*91
Type of cell	N-type Mono
Thickness of glass (mm)	2.0
Type of frame	Anodized aluminum alloy
Junction box	IP68
Size of module (mm)	1722*1134*30
Weight (kg)	24.2
Cables/connectors	4mm², MC4 compatible
Length of Cabel	Portrait: +300mm/-300mm

## Maximum Ratings

Operating Temperature(°C)	-40~85
Operating humidity(°C)	5~85
Allowable Hail Load	25mm ice-ball with velocity of 23m/s

Revised in November 2023 1st Edition

CAUTION: All rights and explain reserved by EGING PV.

Specifications included in this datasheet are subject to change without notice.



Tel: 86-519-82585880

Zip: 213213

Add: No.18, Jinwu Road, Jintan Dist,

Changzhou City, Jiangsu Province.

Email: marketing@egingpv.com

Web: www.egingpv.com